


# 1400

## Wall-Mounted Fold-Up Backstop (48"-144")



Style of Bank	Without Height Adjuster			With Height Adjuster		
	Dimension A	Dimension B	Spread	Dimension A	Dimension B	Spread
Fan Aluminum	9' 9½"	1' 8"	1' 5½"	9' 11½"	3' 0"	1' 5½"
Fan Fiberglass	10' 2"	1' 8"	1' 5½"	10' ¼"	3' 0"	1' 5½"
Fan Glass	10' 2"	1' 8"	1' 5½"	N/A	N/A	N/A
72" x 42" Rectangular Fiberglass	10' 3"	1' 8"	1' 5½"	10' ¼"	3' 0"	1' 5½"
72" x 42" Rectangular Glass	9' 9"	3' 0"	2' 7½"	9' 10½"	3' 0"	1' 5½"
72" x 42" Rectangular Steel	10' 1¼"	1' 8"	1' 5½"	9' 11½"	3' 0"	1' 5½"
72" x 42" Rectangular Wood	9' 9"	3' 0"	2' 7½"	9' 10½"	3' 0"	1' 5½"

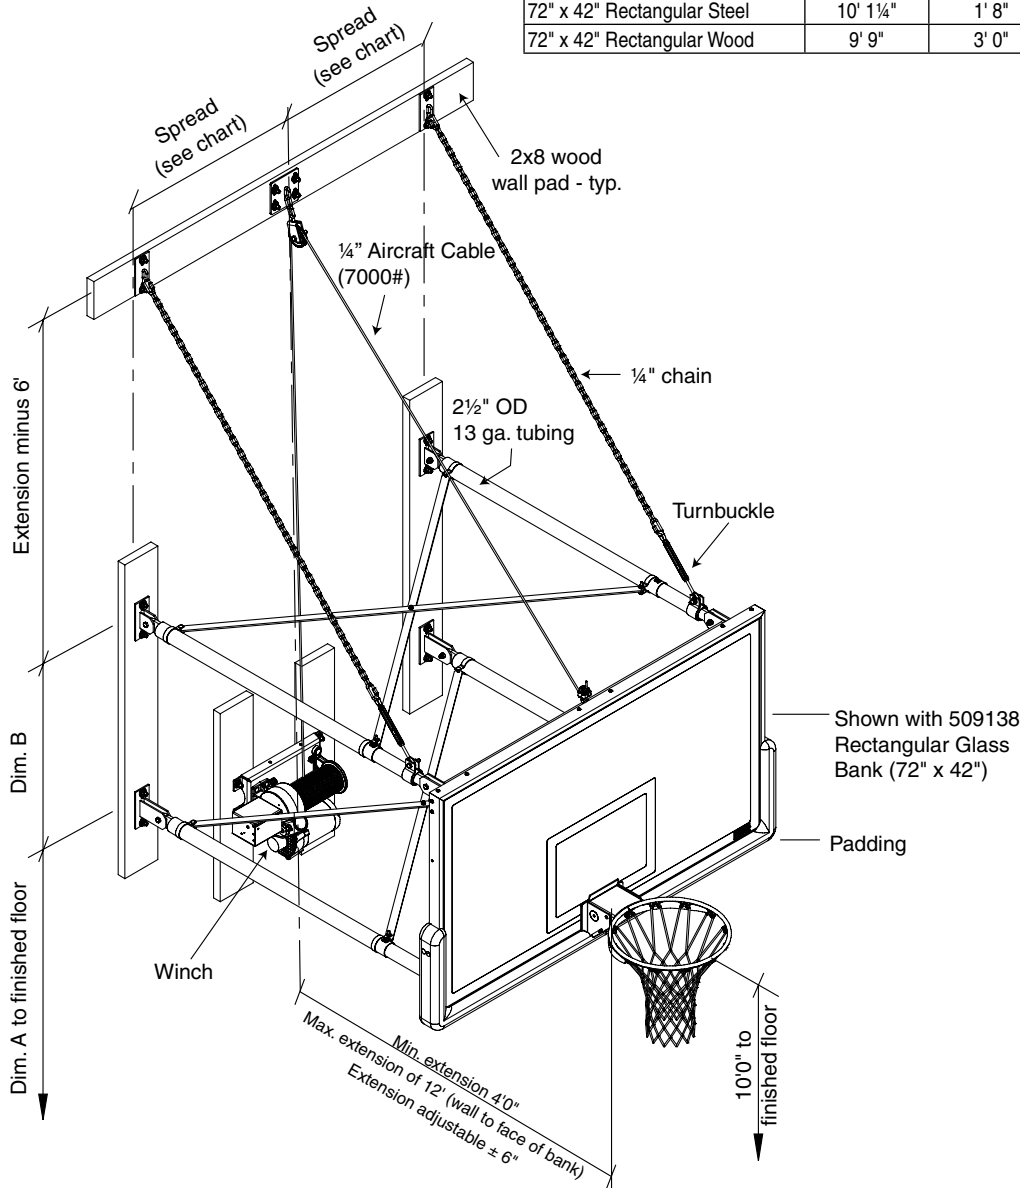

Progressive offers a 25-year limited warranty on the basketball backstop structure.



765-987-7999  
866-637-5611  
411 S. Pearl St.  
Spiceland IN 47385 USA  
www.progressivescgroup.com

PROJECT: _____
ARCHITECT: _____
CONTRACTOR: _____
SUPPLIER: _____
DATE: _____ REVISED: _____

**Specifications—Progressive 1400***Wall-Mounted Fold-Up Backstop (48"-144")**Product Description*

**EXTENSION:** Backstop shall be a wall mounted and wall braced style with the bank face being extended (48" to 144") from the supporting wall. Extension frame shall be constructed of (4) 2½" (6.35 cm) OD 13 gauge and 2¼" (5.72 cm) OD 14 gauge steel tubes terminating with fabricated steel hinge plates for attachment to wood all pads and the backboard. Hinges shall be offset to allow the backstop to fold closer to the wall. Frame shall be adjustable for a plus or minus 6" (15.24 cm) variation from face of bank to wall.

**BRACING:** Frame shall be braced horizontally by use of ¼" x 1½" (6.35 mm x 3.81 cm) steel cross brace terminating in precision die formed clamps.

**SUPPORT:** Backstops will be supported in playing position by two ¼" (6.35 mm) welded link chains with turnbuckles for leveling.

**OPERATION:** Backstop shall be folded by means of cable and a winch. The hoist cable shall be ¼" (6.35 cm) diameter galvanized aircraft cable with 7000 lbs. breaking strength. Backstop shall not be supplied with any winch, which must be specified separately. To operate, unit must utilize either the Model 503086 heavy duty, fully enclosed worm gear type,

wall mounted manual winch designed to hold backstop in any position during raising or lowering of backboard or the Model 503085 electrically operated, maintenance free instant reverse winch. For complete specifications, see separate sheets.

**MOUNTING:** Backstop shall be provided with 2 x 8 (5.08 x 20.32 cm) southern yellow pine wall pads at attachment points. All edges shall be chamfered and finished with high-gloss polyurethane.

**FINISH:** All metal parts shall be finished with choice of gloss black or gloss white powder coat. Other colors optionally available.

**WARRANTY:** There is a 25-year limited warranty on all Progressive backstop structures and fittings.

**OPTIONS:** Backstop can be provided with any of several different styles of backboards goals and padding. Specify types desired.

**ACCESSORIES:** See separate sheets for Height Adjusters, Strap, and Control Systems.

**LEED® Submittal Information**

Credit	Measure	
MRc4 – Recycled Content	Post Consumer Average 26.90%	Post Industrial 0%
MRc5 – Regional Materials	Raw materials are commodity items from multiple sources so extraction point cannot be determined. Final Manufacturing/Assembly in Spiceland, IN 47385	