


1500

Wall-Mounted Side Fold Backstop (48"-144")

by



Style of Bank	Without Height Adjuster			With Height Adjuster		
	Dimension A	Dimension B	Spread	Dimension A	Dimension B	Spread
Fan Aluminum	9' 9½"	1' 8"	1' 5½"	9' 11½"	3' 0"	1' 5½"
Fan Fiberglass	10' 2"	1' 8"	1' 5½"	10' ¼"	3' 0"	1' 5½"
Fan Glass	10' 2"	1' 8"	1' 5½"	N/A	N/A	N/A
72" x 42" Rectangular Fiberglass	10' 3"	1' 8"	1' 5½"	10' ¼"	3' 0"	1' 5½"
72" x 42" Rectangular Glass	9' 9"	3' 0"	2' 7½"	9' 10½"	3' 0"	1' 5½"
72" x 42" Rectangular Steel	10' 1¼"	1' 8"	1' 5½"	9' 11½"	3' 0"	1' 5½"
72" x 42" Rectangular Wood	9' 9"	3' 0"	2' 7½"	9' 10½"	3' 0"	1' 5½"

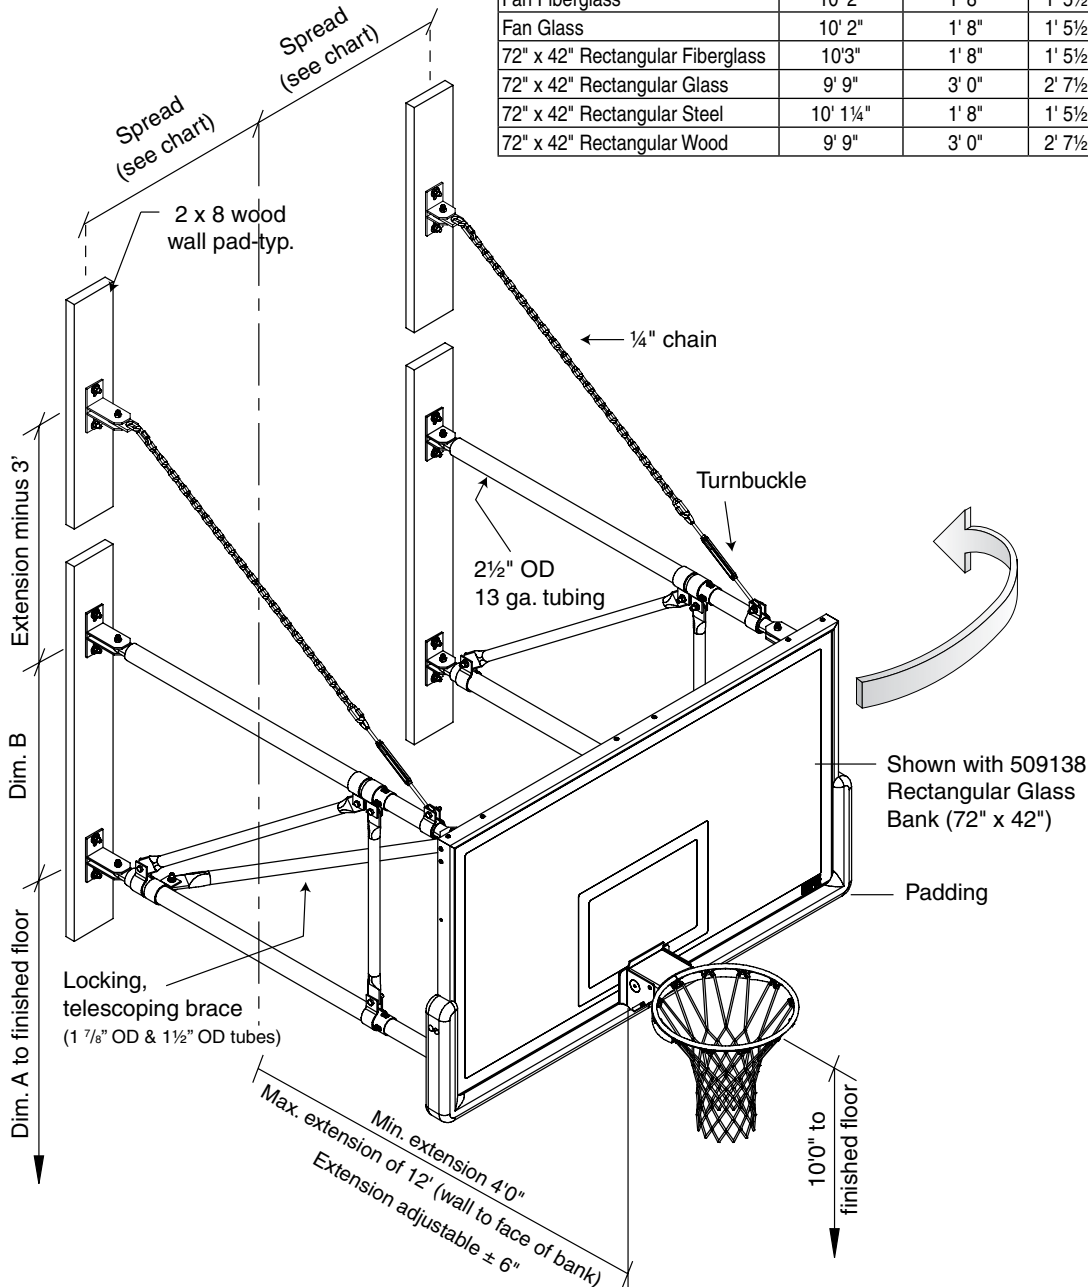

Progressive offers a 25-year limited warranty on the basketball backstop structure.



765-987-7999
866-637-5611
411 S. Pearl St.
Spiceland IN 47385 USA
www.progressivescg.com

PROJECT: _____
ARCHITECT: _____
CONTRACTOR: _____
SUPPLIER: _____
DATE: _____ REVISED: _____

Specifications—Progressive 1500**Wall-Mounted, Side Fold Backstop (48"-144")****Product Description**

EXTENSION: Backstop shall be a wall mounted and wall braced style with the bank face being extended (48" to 144") from the supporting wall. Extension frame shall be constructed of (4) 2½" (6.35 cm) OD 13 gauge and 2¼" (5.72 cm) OD 14 gauge steel tubes terminating with fabricated steel hinge plates for attachment to wood all pads and the backboard. Hinges shall be offset to allow the backstop to fold closer to the wall. Frame shall be adjustable for a plus or minus 6" variation from face of bank to wall. Frame can fold either direction and is determined at the time of installation.

BRACING: Frame shall be braced horizontally by use of a 1⅞" (4.76 cm) OD and 1½" (3.81 cm) OD telescopic locking brace running diagonally across the lower extension arms. Brace is further braced with 1½" (3.81 cm) OD 11 gauge vertical and diagonal steel tubes between each upper and lower extension arm. All braces shall terminate in precision die formed clamps.

SUPPORT: Backstops will be supported in playing position by two ¼" (6.35 mm) welded link chains with turnbuckles for leveling.

OPERATION: Lower brace shall telescope and shall lock in any position by means of a threaded locking device. Brace is supplied with stop color to indicate exact playing position. Backstop shall be folded by using a crank handle (one for

each two backstops provided) to unlock telescopic brace, then placing handle in eyebolt located behind backboard and walking backstop to desired position. Backstop should be locked in desired position by inserting handle into threaded lock and tightening.

MOUNTING: Backstop shall be provided with 2 x 8 (5.08 x 20.32 cm) southern yellow pine wall pads at attachment points. All edges shall be chamfered and finished with high-gloss polyurethane.

FINISH: All metal parts shall be finished with choice of gloss black or gloss white powder coat. Other colors optionally available.

WARRANTY: There is a 25-year limited warranty on all Progressive backstop structures and fittings.

OPTIONS: Backstop can be provided with any of several different styles of backboards goals and padding. Specify types desired.

ACCESSORIES: See separate sheets for Height Adjusters.

LEED® Submittal Information

Credit	Measure	
MRc4 – Recycled Content	Post Consumer Average 26.90%	Post Industrial 0%
MRc5 – Regional Materials	Raw materials are commodity items from multiple sources so extraction point cannot be determined. Final Manufacturing/Assembly in Spiceland, IN 47385	

Progressive 1400—Folding Operation